


Dealer:	Date:	<input type="checkbox"/> Quote Only <input type="checkbox"/> Dealer PO
Attn:	Phone:	Fax:
ROOF ACCESS HATCH		

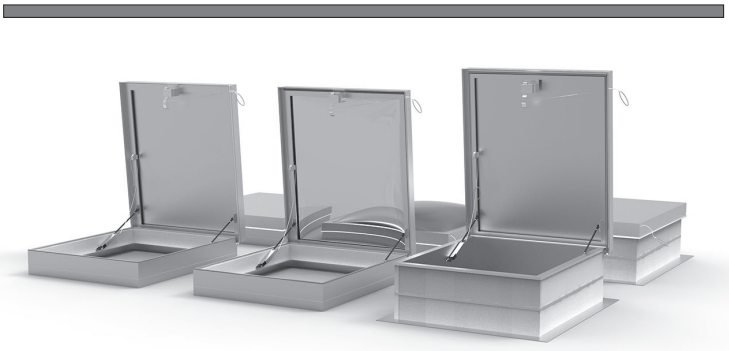

	METAL LID ROOF HATCH	DOME LID ROOF HATCH
QTY		
MOUNT	<input type="checkbox"/> Curb Mount <input type="checkbox"/> on 12" Self-Flashing Curb <input type="checkbox"/> on Self-Flashing Curb at _____ inches tall.	<input type="checkbox"/> Curb Mount <input type="checkbox"/> on 12" Self-Flashing Curb <input type="checkbox"/> on Self-Flashing Curb at _____ inches tall.
FINISH	<input type="checkbox"/> mill <input type="checkbox"/> _____	<input type="checkbox"/> mill <input type="checkbox"/> _____
STANDARD SIZE BY ROUGH OPENING	WIDTH (hinge) x LENGTH <input type="checkbox"/> 36" x 30" 39" x 33" outside curb <input type="checkbox"/> 30" x 36" 33" x 39" outside curb <input type="checkbox"/> 48" x 48" 51" x 51" outside curb	WIDTH (hinge) x LENGTH <input type="checkbox"/> 36" x 30" 39" x 33" outside curb <input type="checkbox"/> 30" x 36" 33" x 39" outside curb <input type="checkbox"/> 48" x 48" 51" x 51" outside curb
CUSTOM SIZE	WIDTH (hinge) x LENGTH OUTSIDE CURB DIM <input type="checkbox"/> ____ X ____ NOTE: Hinge must be on the long dimension. NOTE: Maximum outside curb dimension for both width and length is 51 inches.	WIDTH (hinge) x LENGTH OUTSIDE CURB DIM <input type="checkbox"/> ____ X ____
LID TYPE	FLAT LID <input type="checkbox"/> aluminum	DOUBLE DOME <input type="checkbox"/> clear / clear <input type="checkbox"/> white / clear
MANUAL RELEASE	interior included exterior included	interior included exterior included

Standard Specifications

- Engineered with gas struts to provide smooth, easy, one-hand operation, regardless of size.
- Automatic hold-open arm locks the cover in the open position to ensure safe egress.
- Overlapping cover design, full welded corners on cover and curb, EPDM rubber gasket, and fully insulated cover and curb ensure weather tightness and energy efficiency.
- Constructed with corrosion resistant materials to provide many years of trouble free, dependable service.
- Heavy gauge construction and positive latching mechanism to maintain building security.
- Material: Aluminum cover and frame.
- Cover: Brakeformed, hollow-metal design with 1" (25 mm) concealed XPS insulation, fully welded corners and seams, and internally reinforced for 40 psf (195 kg/m²) live load.
- Gasket: Extruded EPDM rubber gasket permanently adhered to cover.
- Hinges: Heavy-duty full length corrosion resistant aluminum hinge.
- Latch: Slam latch with interior turn handle, padlock feature and exterior cable release.
- Performance Ratings: Complies with UL 790 Class A.
- Finish: Aluminum: Mill Finish.
- Hardware: All other hardware is zinc plated/chromate sealed.
- Standard Hardware is designed for roof pitches of 2/12 or less.

Estimated Dealer Cost
quote good for 30 days



EVERETT
 phone: 1-800-666-6065
 fax: 425-258-6734

SPOKANE
 phone: 1-800-382-5403
 fax: 509-921-2137

SALEM
 phone: 1-800-664-1257
 fax: 503-391-0974