

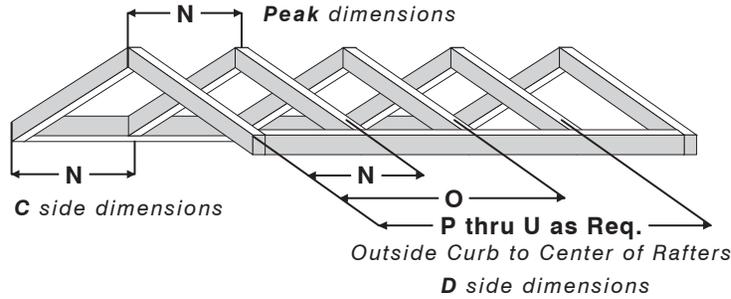


Dealer / Contact	Date
Email / Phone	<input type="checkbox"/> Quote Only <input type="checkbox"/> Dealer PO
RIDGE	

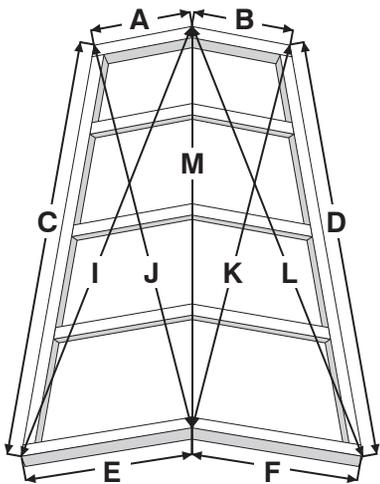


* check the appropriate side if a wall is present

Outside Curb Dimensions			
	inches	wall	inches
A			I
B			J
C			K
D			L
E			M
F			if required
G			

Existing Mullion Supports? <input type="checkbox"/> Yes <input type="checkbox"/> No			
Number of Lites			
Mullion Spacing from OCD to Rafter Centers			
	inches		inches
N	D side	R	D side
	Peak		Peak
	C side		C side
O	D side	S	D side
	Peak		Peak
	C side		C side
P	D side	T	D side
	Peak		Peak
	C side		C side
Q	D side	U	D side
	Peak		Peak
	C side		C side

Curb Condition see page 2 to record curb material make-up

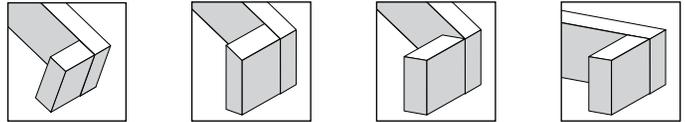


- 90° Curb to Roof Pitch
 Plumb Curb Cut To Pitch
 Plumb Curb Flat Top
 Flat Roof
Typical

O.A. Finished Curb Thickness: _____"
 Please note if head and sill curb conditions vary.


Curb Height: _____"

O.A. Finished Rafter Thickness: _____"



Roof Material: _____

Roof Pitch:



G measurement is taken from 12" down the slope from the apex of the ridge. These dimensions verify the roof pitch - if not already determined.

_____ " 12"
 Minimum 2/12 pitch required for all glass.

Frame Color _____

- Bronze Anodized
 Clear Anodized

Glazing Type _____

- Residential Commercial
 Laminated or Polycarb. Glazing Required

ADDITIONAL INFORMATION

Use this space to sketch out and list the dimensions of any information not mentioned on the previous page. This could include such items as glaze-in-openers, obstructions, ect...

Specific Curb Make-Up

Use this space to sketch out and list the dimensions of any finishing associated with the curb.

Specific Notations

Use this space to list critical items we should be aware of, such as: loading requirements, height restrictions, and any other local requirements.

Opening Skylite Accessories

- Manual Opener
 - Truth Chain Drive
 - Dazon Threaded Rod
 - Hand Angle Drive
 - Pole Straight Drive
 - 3'- 5' Pole
 - 6'-10' Pole
- Solar Smart - Electric Opener
 - Battery Powered, Solar Charged - No Wiring Required