




Dealer / Contact		Date
Email / Phone	<input type="checkbox"/> Quote Only <input type="checkbox"/> Dealer PO	
AWNING		

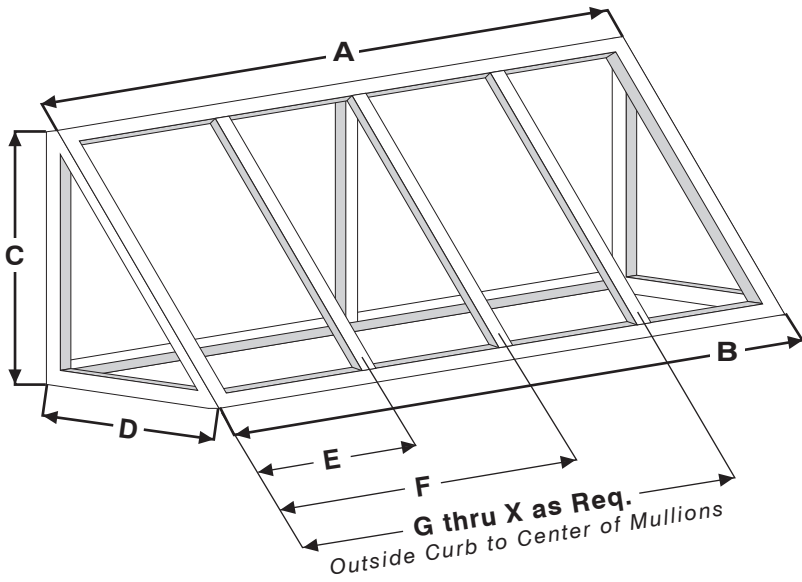

Open Ends



Closed Ends

Roof Pitch

___" | 12"

Minimum 2/12 pitch required for all glass & flat-glazed skylites.

Frame Type

- 4843
- 30258
- Other

Frame Color

- Bronze Anodized
- Clear Anodized

Glazing Type

- Residential
- Commercial
Laminated or Polycarb. Glazing Required

	Outside Curb Dim.
	inches
A	
B	
C	
D	

Number of Lites		Mullion Spacing from Outside Edge to Mullion Centers (optional)	
	inches		inches
G		M	
H		N	
I		O	
J		P	
K		Q	
L		R	
		S	
		T	
		U	
		V	
		W	
		X	

ADDITIONAL INFORMATION

Use this space to sketch out and list the dimensions of any information not mentioned on the previous page. This could include such items as glaze-in-openers, obstructions, ect...

Specific Curb Make-Up

Use this space to sketch out and list the dimensions of any finishing associated with the curb.

Specific Notations

Use this space to list critical items we should be aware of, such as: loading requirements, height restrictions, and any other local requirements.

Opening Skylite Accessories

- Manual Opener
 - Truth Chain Drive
 - Dazon Threaded Rod
 - Hand Angle Drive
 - Pole Straight Drive
 - 3'- 5' Pole
 - 6'- 10' Pole
- Solar Smart - Electric Opener
 - Battery Powered, Solar Charged - No Wiring Required