



Dealer / Contact	Date
Email / Phone	<input type="checkbox"/> Quote Only <input type="checkbox"/> Dealer PO

CLUSTER SYSTEM

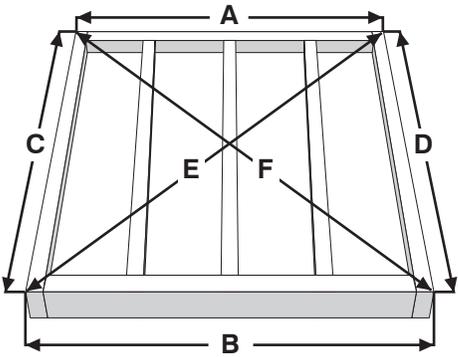


Outside Curb Dimension
Include Flashing & Other Finishing

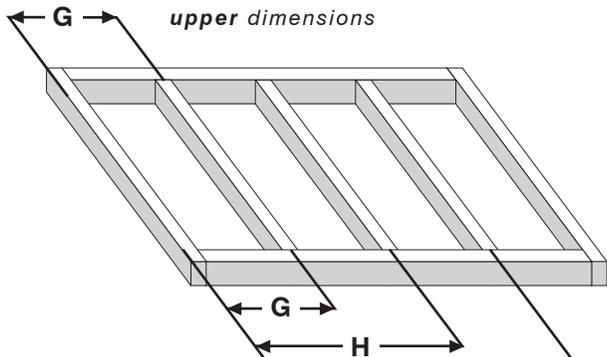

upper dimensions

lower dimensions

Number of Lites Wide



Number of Lites within Rafters

* check the appropriate side if a wall is present


S I D E S	Outside Curb Dim.	
	inches	wall
A		
B		
C		
D		
E		
F		

Existing Mullion Supports? Yes No

Rafters / Mullion Spacing from Outside Curb to Rafter Centers			
	inches	inches	inches
G	upper	K	upper
	lower		lower
H	upper	L	upper
	lower		lower
I	upper	M	upper
	lower		lower
J	upper	N	upper
	lower		lower
		O	upper
			lower
		P	upper
			lower
		Q	upper
			lower
		R	upper
			lower

Curb Condition

see page 2 to record curb material make-up

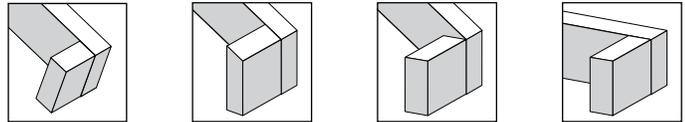


- 90° Curb to Roof Pitch
 Plumb Curb Cut To Pitch
 Plumb Curb Flat Top
 Flat Roof **Typical**

O.A. Finished Curb Thickness: _____"
Please note if head and sill curb conditions vary.

Curb Height: _____"

O.A. Finished Rafter Thickness: _____"



Roof Pitch

- Flat Roof

_____ " 12" Roof Material: _____
Minimum 2/12 pitch required for all glass.

Frame Type

- 5842 3921 3962
 4843 (required base frame)

Frame Color

- Bronze Anodized
 Clear Anodized

Glazing Type

- Residential Commercial
 Laminated or Polycarb. Glazing Required



Shape

- Dome Pyramid

ADDITIONAL INFORMATION

Use this space to sketch out and list the dimensions of any information not mentioned on the previous page. This could include such items as glaze-in-openers, obstructions, ect...

Specific Curb Make-Up

Use this space to sketch out and list the dimensions of any finishing associated with the curb.

Specific Notations

Use this space to list critical items we should be aware of, such as: loading requirements, height restrictions, and any other local requirements.

Opening Skylite Accessories

- Manual Opener
 - Truth Chain Drive
 - Dazon Threaded Rod
 - Hand Angle Drive
 - Pole Straight Drive
 - 3'- 5' Pole
 - 6'-10' Pole
- Solar Smart - Electric Opener
 - Battery Powered, Solar Charged - No Wiring Required